



V 1.1 - 102024

PeopleLink e-Podium Elite


[Watch Video](#)


PeopleLink e-Podium Elite offers unmatched interactivity among various digital devices with its ergonomic design. Its technological ease enables collaboration with partners, customers, and business associates. Its modular form factor provides significant productivity benefits, facilitating easy mobility of the device.

General Specifications:

BODY / FORM FACTOR

Body & Top : Metallic

Top Sliding Mechanism : Yes

Provision for Monitor : Yes (up to 22 inches)

Electronic Monitor Lift : N\A

Document Camera Tray : Yes (Sliding Type)

RFID : Optional

Touch Monitor Features

Screen Size : 21.5" Diagonal

Resolution : 1920 x 1080

PC Connection : USB Port

Brightness : 250 cd/m2

Input : DVI, HDMI

Touch : Finger and Stylus

Stylus Type : Battery Free Pen

Display Colors : 16.7M

Response time : 5ms

Contraste ratio : 1000/1

Operating System : Windows, Linux, Mac.

Electrical

Power : 100 – 250V AC.

CPU (Optional)

Processor : Intel i3 / i5

RAM : 4 GB

HDD : 1000 GB

Operating System : Windows 10

Keyboard & Mouse : Yes

General Specifications

Digital Signal Processor

Frequency Range : 30Hz -15000 Hz

Automatic Echo Cancellation : Yes

Automatic Gain Control : Yes

Dynamic Noise Reduction : Yes

Full Duplex : Yes

1x Line Input, 1 x Line Output, 1 x USB Port

Multi Channel Digital Signal Processor

Microphone Options : 1 lapel + 1 Handheld

Frequencies Response : 50 Hz-18000 Hz

Antennas : 2 x 3dBi

Output : Balanced Out x2, Mixed Out x 1

Volume Control : Yes

Amplifier : Yes

Line Input : 1x Balanced, 2 x Unbalanced.

Phantom : Yes (15 V for Balanced Input)

Power output @8 ohms : 50 Watts x2

Minimum impedance : 8 Ohms

Frequency response : 20Hz-20000Hz

Speakers (1Pair) : 50 Watts Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequency response)

Mcc AIO DSP 200W : (Optional)

Central Controller

Ethernet : 10/100 Mbps, Full / Half Duplex, IPV4

RS-232 Port : Total 3 dedicated RS-232C Ports. (3-pin 3.81mm detachable terminal; Bidirectional TTL/RS-232 (0-5 Volts) port with up to 115200 baud rate)

Power : One 3.5mm DC power jack connector with an associated Power Switch on the rear panel. 12V DC power input with a 1.5 Amp maximum current rating

RS-232/IR Hybrid Port : Total 4 RS-232C/IR Ports (3-pin 3.81 mm detachable terminal), Comprises IR/Serial output ports; Bidirectional TTL/RS-232 (0-5 Volts) port with upto 115200 baud rate when configured as serial; One-way IR output when configured as IR Emitter.

Relay Switch Port : Total 10 blocks (each 2-pin 3.81 mm detachable terminal), Comprises normally open, Non-Isolated relays; Rated 6 Amp, 230 Volts AC or 110 Volts DC max.

Analog Signal: Total 9 blocks (operated from 3 channels Ch-1 to Ch-3) on rear panel with each 2-pin 3.81 mm detachable terminal; Rated for 0-10 Volts DC, protected to 10 Volts DC maximum, input impedance 10k Ohms with pull-up resistor.

Operating Temperature : 50° to 113° F (10° to 45° C)

Humidity: RH Non-Condensing 15% to 85%.

Heat Dissipation: 45 BTU/hr

Gooseneck Microphone Features: (Optional)

Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.

Polar Pattern : Cardioids

Connectors : 3-Pin XLR

Control Pad

Control Pad : 7 Inches Touch Screen

Resolution : 800 x 480

Interface : WiFi.

Power : 12V / 1A

Size : 7 Inches

Internal Memory : 2 GB

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x USB Type-C, 2x HDMI

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

LAN Port : 1x RJ-45


USB Ports : 4x USB 2.0 Ports, 1X USB 3.0 Ports, 1xUSB (Laptop Touch & DSP), 1xUSB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

RS-232 Port : Yes

Video Ports : 4 Ports, 2 x Laptop, 1 x PC, 1 x Visualizer
Switcher : in-built

Application Scenarios

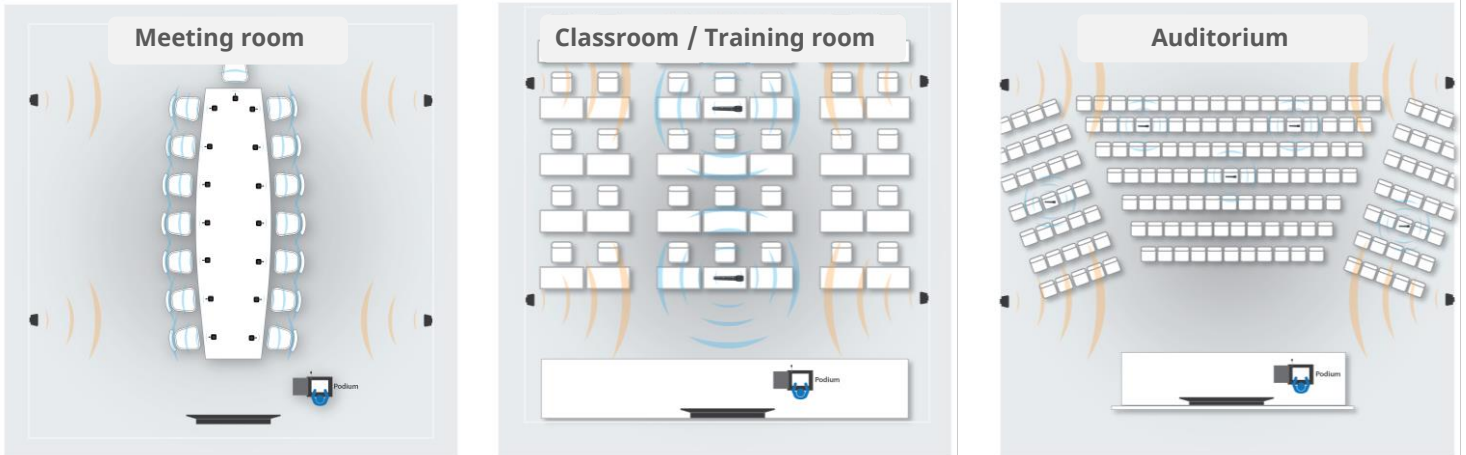

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



Ordering Information

Accessories

PeopleLink e-Podium Elite

PeopleLink e-Podium Elite 200 (With MCC AIO DSP 200W)

- : 1.5 Mtrs HDMI Cable x4, 3.5mm Male to Male x 2, Stereo to 2RCA x 2, USB 2.0 M to M x 4.
- : **PCU-PDP-EP-ELITE**
- : **PCU - PDP - EP - ELITE200**

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com