



V 1.1 - 102024

PeopleLink e-Podium Ultra200

Specifications

BODY / FORM FACTOR

Body and Top : Metallic

All Doors Lockable: Yes

Top Sliding Mechanism : Yes

Provision for Monitor : Yes
(up to 22 inches)

Electronic Monitor Lift : Yes

Document Camera Tray : Yes
(Sliding Type)

RFID : Optional

Touch Monitor Features

Screen Size : 21.5" Diagonal

Resolution : 1920 x 1080

PC Connection : USB Port

Brightness : 250 cd/m2

Input : HDMI

Display Colors : 16.7M

Response Time : 5ms

Contrast Ratio : 1000/1

Operating System : Windows, Linux,
Mac.

Electrical

Power : 100 – 250V AC


[Watch Video](#)


PeopleLink e-Podium Ultra delivers seamless interactivity among various digital devices. Its ergonomic design allows you to collaborate with your partners, customers, and business associates with technological ease. It provides great productivity benefits due to its modular form factor, enabling easy mobility of the device.

General Specifications

Digital Signal Processor

Frequency Range : 30Hz -15000 Hz

Automatic Echo Cancellation : Yes

Automatic Gain Control : Yes

Dynamic Noise Reduction : Yes

Full Duplex : Yes

Line Input : 1x Line Input

Line Output : 1 x Line Output

USB Audio Port : 1 x USB Port

Multi Channel Digital Signal

Package Includes

Microphone Options : 1 lapel + 1 Handheld

Frequencies Response : 50 Hz-18000 Hz

Antennas : 2 x 3dBi

Output : Balanced Out x2, Mixed Out x 1

Volume Control : Yes

Amplifier : Yes

Line Input : 1x Balanced, 2 x Unbalanced.

Phantom : Yes (15 V for Balanced Input)

Power Output @8 ohms : 100 Watts x2

Minimum Impedance : 8 Ohms

Frequency Response : 20Hz-20000Hz

Speakers (2Pair): 50 Watts Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequency response)

Central Controller

Ethernet : 1x RJ-45

RS-232 Port : Total 1 dedicated RS-232 Port

Relay Switch Port : Screen Up / Screen Down (2 Nos)

Gooseneck Microphone Features: (Optional)

Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.

Polar Pattern : Cardioids

Connectors : 3-Pin XLR

Control Pad

Type : Buttonpad

Interface : RS-232

Power : 12V

Size : N/A

Type: Button Pad with Buttons: VGA, HDMI, PC, Screen up / Screen Down, Projector Lift up, Projector Lift Down, Mic Mute / Unmute, Volume Mute / Unmute, Volume Up/Down.

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x USB TYPE-C, 2 x HDMI

Audio Port for Laptop : 1x 3.5mm Stereo Female Port

LAN Port : 1x RJ-45

USB Ports : 4x USB 2.0 Ports, 1x USB 3.0 Ports, 1xUSB (Laptop Touch & DSP), 1xUSB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

RS-232 Port : 1X 3 Pin RS-232 Ports, 1 x 9 Pin RS-232 Port.

Video Input Ports : 2 HDMI x Laptop, 1 HDMI x PC, 1 HDMI x Visualizer

Switcher : Inbuilt 4 HDMI Input, 2 HDMI Output, 1 VGA Output

CPU (Optional)

Processor : Intel i5 / i7




RAM : 16 GB

SSD : 512 GB

Operating System : Windows 11 Pro

Keyboard & Mouse : Yes

Application Scenarios

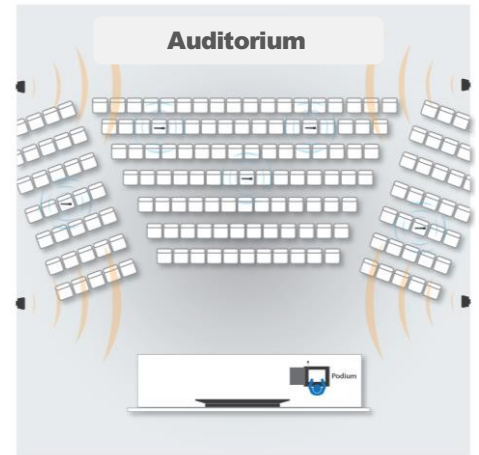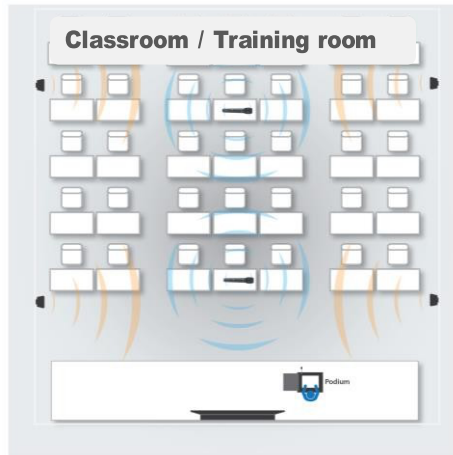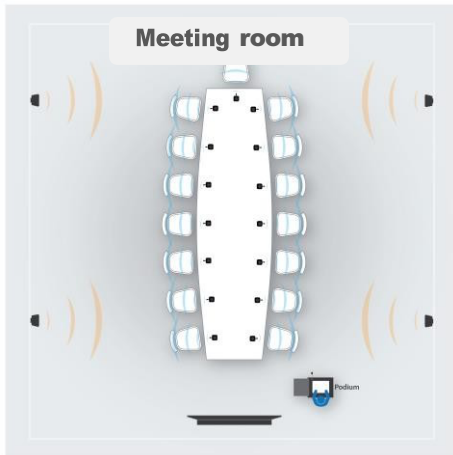

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



Ordering Information

Accessories	:	1.5 Mtrs HDMI Cable x 2, 3.5mm Male to Male x 1, 1.5 mtrs USB 2.0 M to M x4.
Part code	:	PCU-PDP-EP-ULTRA200

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com