



V 1.1 - 102024

PeopleLink Signage e-Podium Delta Plus


[Watch Video](#)


PeopleLink Signage e-Podium Delta Plus delivers unmatched interaction with various digital devices. Its ergonomic design allows you to collaborate with your partners, customers, and business associates with technological ease. Its modular form factor provides great productivity benefits, enabling easy mobility of the device.

Specifications

BODY / FORM FACTOR

Body and Top : Metallic

All doors Lockable : Yes

Top Sliding Mechanism : Yes

Provision for Monitor : Yes

Electronic Monitor Lift : Yes

Document Camera Tray : Yes
(Sliding Type)

Door access : Front/Rear

Chassis : Polymer coated CRCA steel sheet

Thickness of enclosure : 1.6mm

CPU (Optional)

Processor : Intel i3 / i5

RAM : 4 GB

HDD : 1TB

Operating System : Windows 10

Keyboard & Mouse : Yes

General Specifications

Touch Monitor Features

Screen Size : 21.5" Diagonal

Resolution : 1920 x 1080

PC Connection : USB Port

Brightness : 250 cd/m2

Input : DVI, HDMI

Touch : Finger and Stylus with capacitive Touch

Stylus Type : Battery Free Pen

Display Colors : 16.7M

Response Time : 5ms

Contrast Ratio : 1000/1

Operating System : Windows, Linux, Mac

Electrical

Power : 100 – 250V AC

Contents

Accessories : 1.5 Meters HDMI Cable x1,
3.5mm Male to Male x 1, USB 2.0 M to M x4.

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x HDMI(4K), 1x USB

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

Buttons: Video Selection buttons x 4, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.

LAN Port : 1x RJ-45

USB 2.0 Ports : 4 x USB 2.0 Ports,
1xUSB (Laptop Touch & DSP), 1xUSB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

Input / Output Ports : 4x HDMI Inputs, 2x HDMI Outputs

Gooseneck Microphone Features: (Optional)

Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.

Polar Pattern and Microphone Type : Cardioids, Polarized Condenser

Connectors : 3-Pin XLR with 48V Phantom Power and 200 Ohms impedance.

Sound Pressure Level (SPL) : 138 DB SPL@ 1% Threshold

Other Features

Signage Screen Size - 32"

Top Sliding Limit Switch - Yes

Laptop Interface - Yes

Podium Wheel Locks - Yes

Rack Space - 12U





TFT Timer - Yes

Visualizer Tray - Yes




Signage Screen - Signage Display 32" (Samsung/Philips

*Signage License if any Shall be Extra)



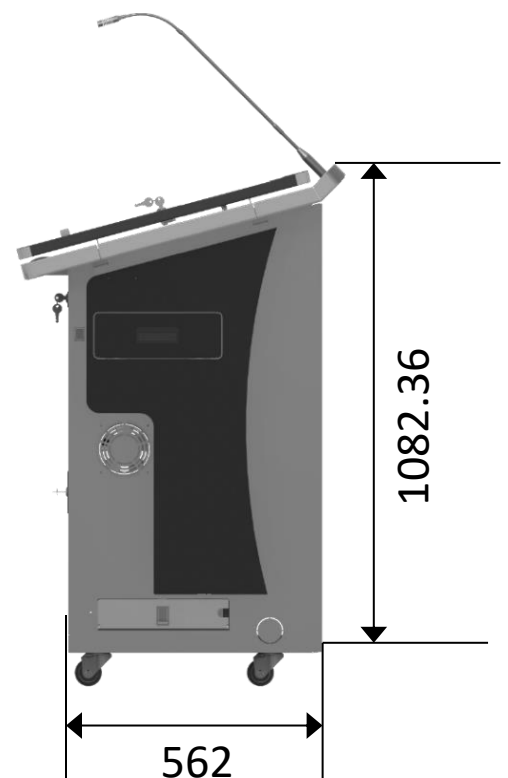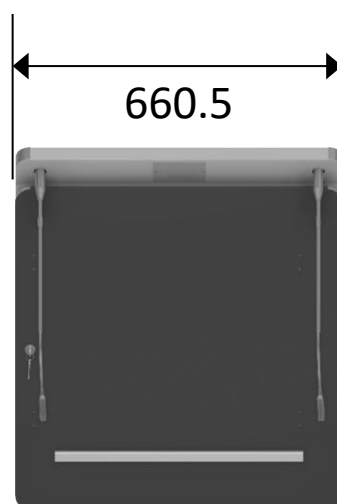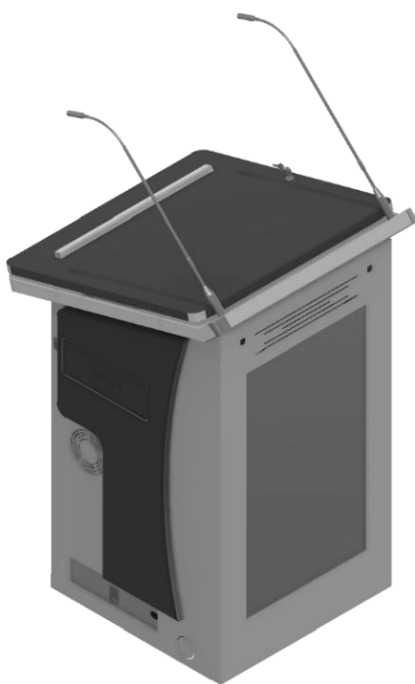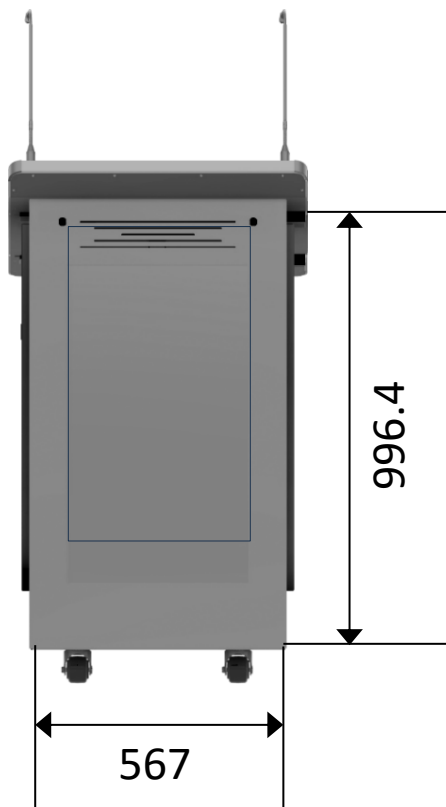

Application Scenarios

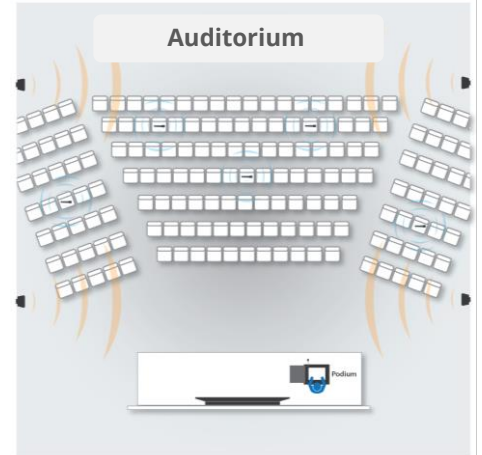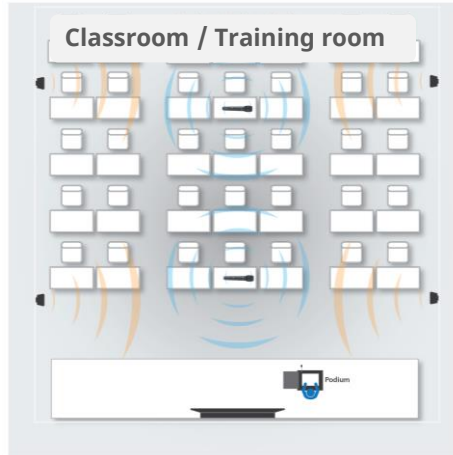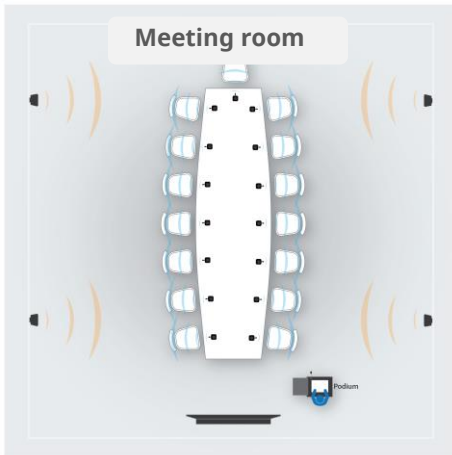

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

Ordering Information

Part code : **PCU-PDP-SP-DELTA PLUS**

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com