



V 1.2 - 072025

## PeopleLink Signage e-Podium Elite


[Watch Video](#)


PeopleLink Signage e-Podium Elite offers unmatched interactivity among various digital devices with its ergonomic design. Its technological ease enables collaboration with partners, customers, and business associates. Its modular form factor provides significant productivity benefits, facilitating easy mobility of the device.

### General Specifications:

#### BODY / FORM FACTOR

**Body & Top :** Metallic

**Top Sliding Mechanism :** Yes

**Provision for Monitor :** Yes (up to 22 inches)

**Electronic Monitor Lift :** N\A

**Document Camera Tray :** Yes (Sliding Type)

**RFID :** Optional

#### Touch Monitor Features

**Screen Size :** 21.5" Diagonal

**Resolution :** 1920 x 1080

**PC Connection :** USB Port

**Brightness :** 250 cd/m2

**Input :** DVI, HDMI

**Touch :** Finger and Stylus

**Stylus Type :** Battery Free Pen

**Display Colors :** 16.7M

**Response time :** 5ms

**Contraste ratio :** 1000/1

**Operating System :** Windows, Linux, Mac.

#### Electrical

**Power :** 100 – 250V AC.

#### CPU ( Optional)

**Processor :** Intel i3 / i5

**RAM :** 4 GB

**HDD :** 1000 GB

**Operating System :** Windows 10

**Keyboard & Mouse :** Yes

## General Specifications

### Digital Signal Processor

**Frequency Range :** 30Hz -15000 Hz

**Automatic Echo Cancellation :** Yes

**Automatic Gain Control :** Yes

**Dynamic Noise Reduction :** Yes

**Full Duplex :** Yes

1x Line Input, 1 x Line Output, 1 x USB Port

### Multi Channel Digital Signal Processor

**Microphone Options :** 1 lapel + 1 Handheld

**Frequencies Response :** 50 Hz-18000 Hz

**Antennas :** 2 x 3dBi

**Output :** Balanced Out x2, Mixed Out x 1

**Volume Control :** Yes

**Amplifier :** Yes

**Line Input :** 1x Balanced, 2 x Unbalanced.

**Phantom :** Yes (15 V for Balanced Input)

**Power output @8 ohms :** 100 Watts x2

**Minimum impedance :** 8 Ohms

**Frequency response :** 20Hz-20000Hz

**Speakers ( 1Pair ) :** 50 Watts Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequency response)

**Mcc AIO DSP 200W :** (Optional)

### Central Controller

**Ethernet :** 10/100 Mbps, Full / Half Duplex, IPV4

**RS-232 Port :** Total 3 dedicated RS-232C Ports. (3-pin 3.81mm detachable terminal; Bidirectional TTL/RS-232 (0-5 Volts) port with up to 115200 baud rate)

**Power :** One 3.5mm DC power jack connector with an associated Power Switch on the rear panel. 12V DC power input with a 1.5 Amp maximum current rating

**RS-232/IR Hybrid Port :** Total 4 RS-232C/IR Ports (3-pin 3.81 mm detachable terminal), Comprises IR/Serial output ports; Bidirectional TTL/RS-232 (0-5 Volts) port with upto 115200 baud rate when configured as serial; One-way IR output when configured as IR Emitter.

**Relay Switch Port :** Total 10 blocks (each 2-pin 3.81 mm detachable terminal), Comprises normally open, Non-Isolated relays; Rated 6 Amp, 230 Volts AC or 110 Volts DC max.

**Analog Signal:** Total 9 blocks (operated from 3 channels Ch-1 to Ch-3) on rear panel with each 2-pin 3.81 mm detachable terminal; Rated for 0-10 Volts DC, protected to 10 Volts DC maximum, input impedance 10k Ohms with pull-up resistor.

**Operating Temperature :** 50° to 113° F (10° to 45° C)

**Humidity:** RH Non-Condensing 15% to 85%.

**Heat Dissipation:** 45 BTU/hr

### Gooseneck Microphone Features: (Optional)

**Cartridge :** 20mm Condenser

**Frequency Response :** 40~20000 Hz.

**Polar Pattern :** Cardioids

**Connectors :** 3-Pin XLR

### Control Pad

**Control Pad :** 7 Inches Touch Screen

**Resolution :** 800 x 480

**Interface :** WiFi.

**Power :** 12V / 1A

**Size :** 7 Inches

**Internal Memory :** 2 GB

### Laptop Interface

**Laptop Interface :** Inbuilt

**Video Port For laptop :** 1x USB Type-C, 2x HDMI

**Audio Port For Laptop :** 1x 3.5mm Stereo Female Port

**LAN Port :** 1x RJ-45

**USB Ports :** 4x USB 2.0 Ports, 1X USB 3.0 Ports, 1xUSB ( Laptop Touch & DSP), 1xUSB ( CPU Touch & DSP)

**Power Socket :** 3 Pin AC 220 Power Socket

**RS-232 Port :** Yes

**Video Ports :** 4 Ports, 2 x Laptop, 1 x PC, 1 x Visualizer  
**Switcher :** in-built

## General Specifications

### Other Features

**Signage Screen Size** - 32"

**Top Sliding Limit Switch** - Yes

**Laptop Interface** - Yes





**Podium Wheel Locks** - Yes

**Rack Space** - 12U


**TFT Timer** - Yes

**Visualizer Tray** - Yes

**Signage Screen** - Signage Display 32" (Samsung/Philips \*Signage License if any Shall be Extra)

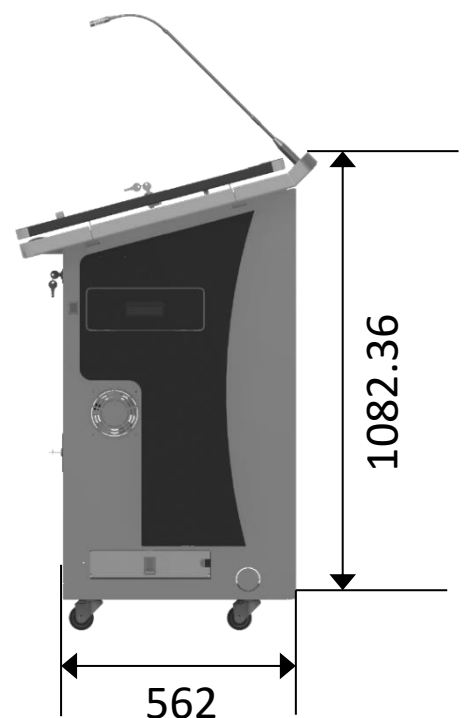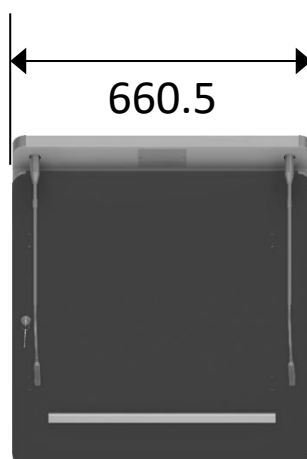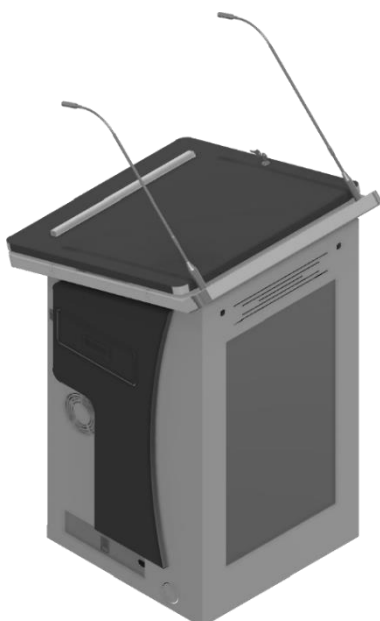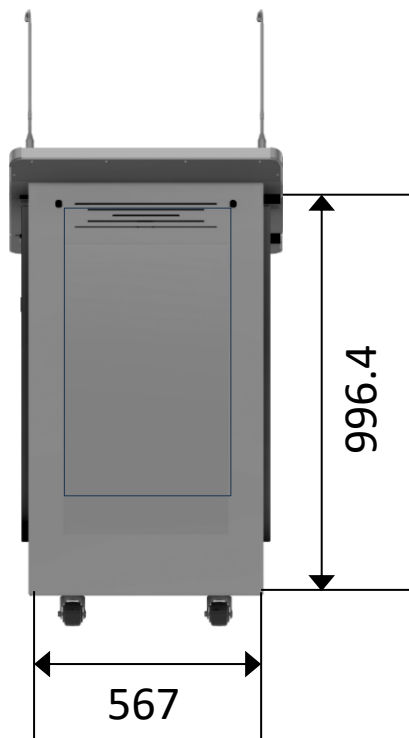

## Application Scenarios

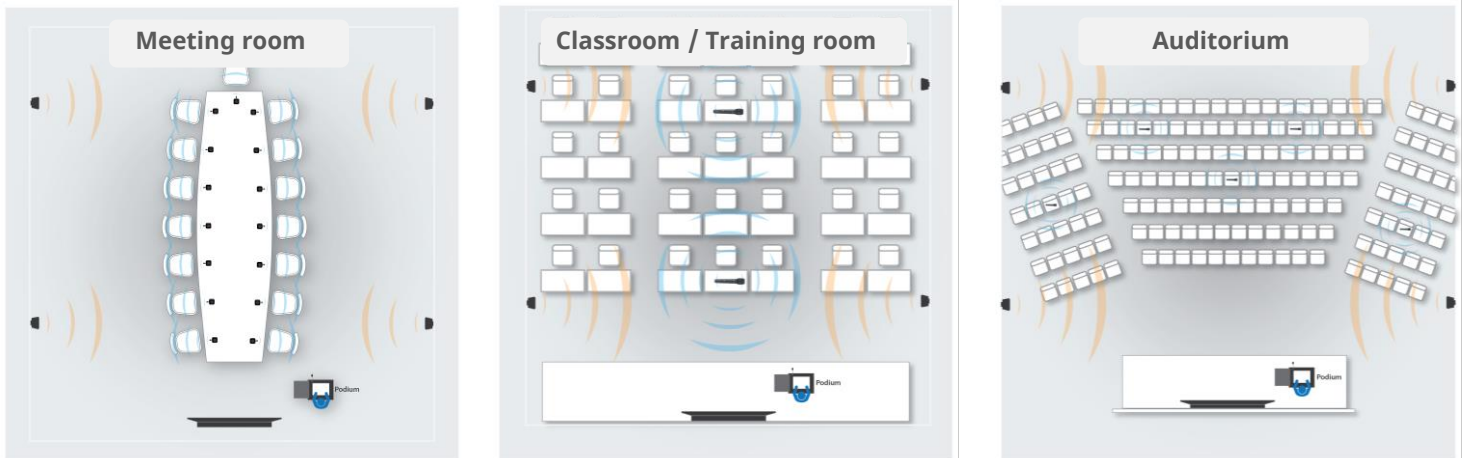

**Disclaimer:-** Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



## Ordering Information

### Accessories

PeopleLink Signage e-Podium Elite

- : 1.5 Mtrs HDMI Cable x4, 3.5mm Male to Male x 2, Stereo to 2RCA x 2, USB 2.0 M to M x 4.
- : **PCU-PDP-SP-ELITE**

### LEARN MORE

For more information on e-Podium [Click Here](#)

## SALES AND INQUIRIES

### Global Headquarters

Q3-A3, 10th Floor Cyber Towers,  
HITEC City, Hyderabad,  
Telangana 500081, **India**  
**Phone:** +91 9100123013  
**Email:** vc@peoplelinkvc.com

### International Contact Numbers

**USA:** +1 669-696-8383  
**Australia:** +61 370 037070  
**France:** +33 6 80 75 26 42  
**Middle East:** +966 5300 19292  
**UK:** +44 20 4571 5454

**UAE:** +971 4 3339082  
**Canada:** +1 647-945-7373  
**Malaysia:** +(6)018-2872188  
**New Zealand:** +64-9-802-4666  
**Africa:** +254 107 529 656

### Tech Support

**Toll Free:** 1800 208 3399  
customersupport@peoplelinkvc.com