



V 1.1 - 102024

PeopleLink Signage e-Podium Ultra Plus


[Watch Video](#)

PeopleLink Signage e-Podium Ultra Plus delivers seamless interactivity among various digital devices with its ergonomic design which allows you to collaborate with your partners, customers and business associates with technological ease; it provides great productivity benefits due to its modular form factor, achieving easy mobility of the device.

Specifications

BODY / FORM FACTOR

Body and Top : Metallic

Top Sliding Mechanism : Yes

Provision for Monitor : Yes (up to 22 inches)

Electronic Monitor Lift : Yes

Document Camera Tray : Yes (Sliding Type)

RFID : Optional

Touch Monitor Features

Screen Size : 21.5" Diagonal

Resolution : 1920 x 1080

PC Connection : USB Port

Brightness : 250 cd/m2

Input : HDMI

Display Colors : 16.7M

Response Time : 5ms

Contrast Ratio : 1000/1

Operating System : Windows, Linux, Mac.

Electrical

Power : 100 – 250V AC

CPU (Optional)

Processor : Intel i3 / i5

RAM : 4 GB

HDD : 1000 GB

Operating System : Windows 10

Keyboard & Mouse : Yes

General Specifications

Digital Signal Processor

Frequency Range : 30Hz -15000 Hz

Automatic Echo Cancellation : Yes

Automatic Gain Control : Yes

Dynamic Noise Reduction : Yes

Full Duplex : Yes

1x Line Input, 1 x Line Output, 1 x USB Port

Multi-Channel Digital Signal Processor

Microphone Options : 1 lapel + 1 Handheld

Frequencies Response : 50 Hz-18000 Hz

Antennas : 2 x 3dBi

Output : Balanced Out x2, Mixed Out x 1

Volume Control : Yes

Amplifier : Yes

Line Input : 1x Balanced, 2 x Unbalanced.

Phantom : Yes (15 V for Balanced Input)

Power Output @8 ohms : 100 Watts x2

Minimum Impedance : 8 Ohms

Frequency Response : 20Hz-20000Hz

Speakers (1Pair) : 50 Watts Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90-20KHz Frequency response)

Central Controller

Ethernet : 10/100 Mbps, Full / Half Duplex, IPV4

RS-232 Port : Total 3 dedicated RS-232C Ports.
(3-pin 3.81 mm detachable terminal;
Bidirectional TTL/RS-232 (0-5Volts)
port with up to 115200 baud rate).

Power : One 3.5mm DC power jack connector with an associated Power Switch on the rear panel. 12V DC power input with a 1.5 Amp maximum current rating

RS-232/IR Hybrid Port : Total 2 RS-232C / IR Ports (3-pin 3.81 mm detachable terminal; Comprises IR/Serial out put ports; Bidirectional TTL/RS-232 (0-5 Volts) port with up to 115200 baud rate when configured as serial; One-way IR output when configured as IR Emitter)

Relay Switch Port : Total 5 blocks (each 2-pin 3.81 mm detachable terminal; Comprises normally open, Non-Isolated relays; Rated 6 Amp, 230 Volts AC or 110 Volts DC max)

Analog Signal : N/A

Operating Temperature : 50° to 113° F (10° to 45° C)

Humidity: RH Non-Condensing 15% to 85%. Heat

Heat Dissipation: 45 BTU/ hr.

Gooseneck Microphone Features: (Optional)

Cartridge : 20mm Condenser

Frequency Response : 40~20000 Hz.

Polar Pattern : Cardioids

Connectors : 3-Pin XLR

Control Pad

Control Pad : 7 Inches Touch Screen

Resolution : 800 x 480

Interface : WiFi.

Power : 12V / 1A

Size : 7 Inches

Type : Touch Screen

Internal Memory : 2 GB

Laptop Interface

Laptop Interface : Inbuilt

Video Port For laptop : 1x USB Type-C, 2x HDMI

Audio Port For Laptop : 1x 3.5mm Stereo Female Port

LAN Port : 1x RJ-45

USB Ports : 4 x USB 2.0 Ports, 1x USB 3.0 Ports,
1 x USB (Laptop Touch & DSP),
1x USB (CPU Touch & DSP)

Power Socket : 3 Pin AC 220 Power Socket

RS-232 Port : 1x 3 Pin RS-232 Ports, 1 x 9 Pin RS-232 Port.

Video Input Ports : 2 HDMI x Laptop, 1 HDMI x PC,
1HDMI x Visualizer

Switcher : Inbuilt 4x HDMI Input, 2x HDMI Output,
1x USB Type-C Output

General Specifications

Other Features

Signage Screen Size - 32"

Top Sliding Limit Switch - Yes

Laptop Interface - Yes





Podium Wheel Locks - Yes

Rack Space - 12U


TFT Timer - Yes

Visualizer Tray - Yes

Signage Screen - Signage Display 32" (Samsung/Philips *Signage License if any Shall be Extra)

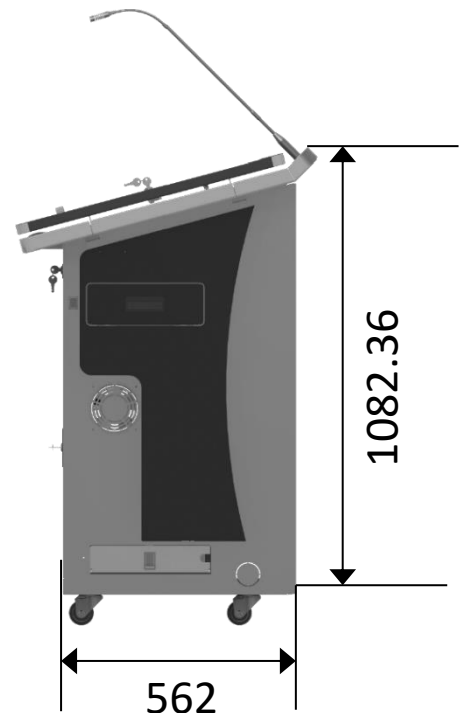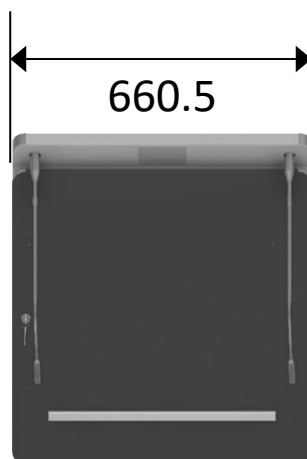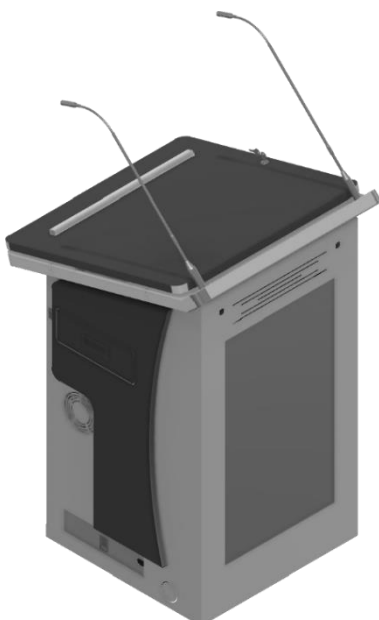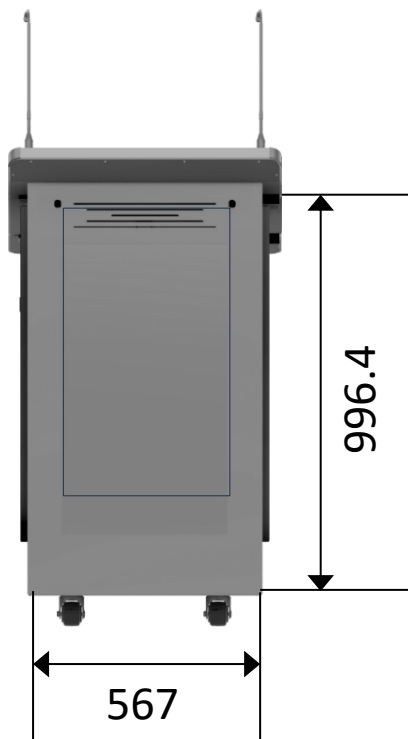

Application Scenarios

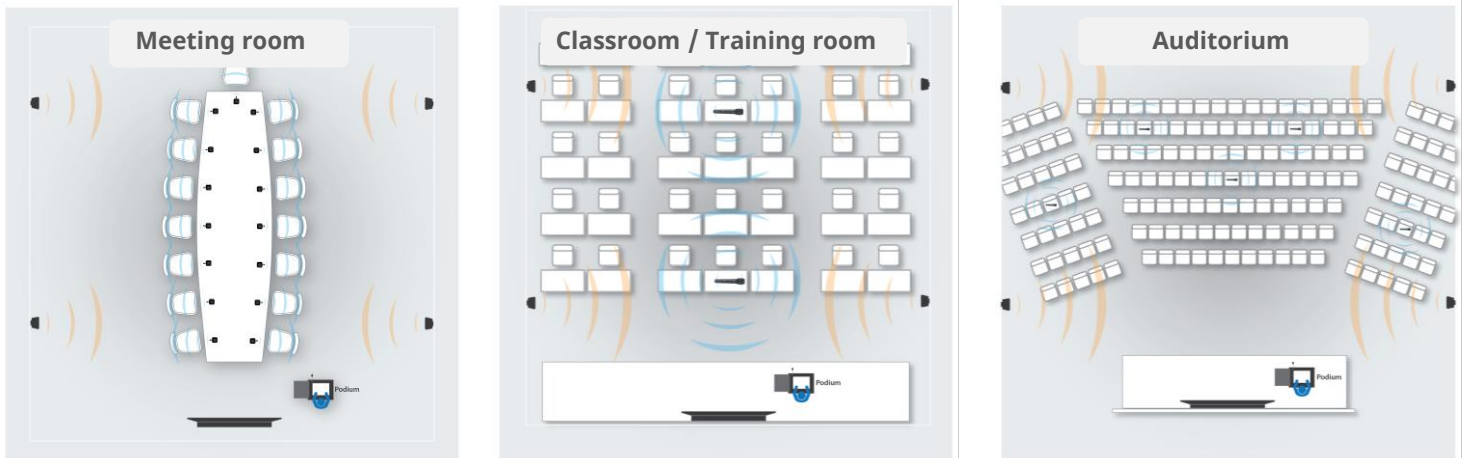

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.



Ordering Information

Accessories

: 1.5 Meters HDMI Cable x 4, 6.5mm Phono M to M Cable x 2,
3.5mm Male to Male x 2, USB 2.0 M to M x 4.

Part code

: **PCU-PDP-SP-ULTRA PLUS**

LEARN MORE

For more information on e-Podium [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 107 529 656

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com